

**Fluorescent Emergency  
Ballast 750 Lumens**



LED Test switch included.

Project:	
Catalog#:	
Approved by:	

**Warranty & Listings**


- Five year warranty against defects in material and workmanship (lamps excluded).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

**Lamp Compatibility**

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one 17W-40W T8 through T12, one or two 18W-26W 4-pin compact or one 18W-40W 4-pin long compact fluorescent lamps. Refer to lamp compatibility chart for a complete list of lamps.

**Illumination**

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90-minutes.
- Provides a maximum initial lumen output of 750 lumens.

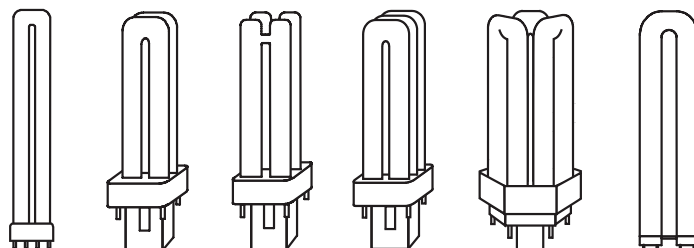

**Electrical**

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp(s) for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



**Mounting**

- Suitable for installation inside, on top or in remote\* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.


**Housing**

- Durable painted steel construction in white finish.
- Provided with 2' flex conduits on both ends.
- Compact design fits most fluorescent fixtures.

\* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

NOTE: In 2-lamp operation, lumens are equally split between the two lamps.

**Dimensions**

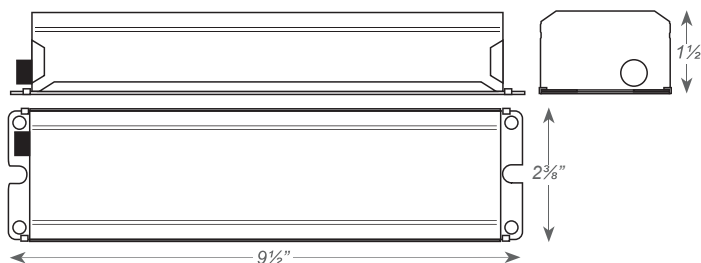

**Lamp Compatibility Chart**

LAMP	INITIAL LUMENS		LAMP	INITIAL LUMENS	
	1-LAMP	2-LAMP		1-LAMP	2-LAMP
4-Pin PL CF 18W	400	550	4-Pin Long CF 18W	550	-
4-Pin PL CF 26W	475	650	4-Pin Long CF 24W	600	-
			4-Pin Long CF 36W	650	-

**Electrical Information**

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
BAL650C-4	1.8	1.8	0.230	0.230