

**Fluorescent Emergency
Ballast 650 Lumens**



Project:	
Catalog#:	
Approved by:	

Warranty & Listings

- Five year warranty against defects in material and workmanship (lamps excluded).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Suitable for use in sealed and gasketed fixtures.

Lamp Compatibility

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one 25W-40W T8 through T12, one 13W-42W 4-pin compact or one 18W-40W 4-pin long compact fluorescent lamps. Refer to lamp compatibility chart for a complete list of lamps.

Illumination

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90-minutes.
- Provides a maximum initial lumen output of 750 lumens.

Electrical


- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp(s) for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Time delay enhancement to overcome end-of-life circuit-protection.

Mounting


- Suitable for installation inside, on top or in remote* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.

Housing

- Durable painted steel construction in white finish.
- Provided with 2' flex conduits on both ends.
- Compact design fits most fluorescent fixtures.

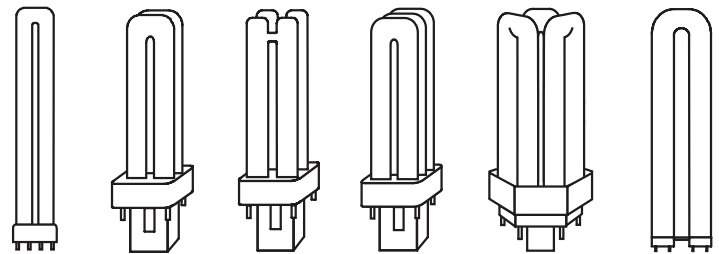

Dimensions

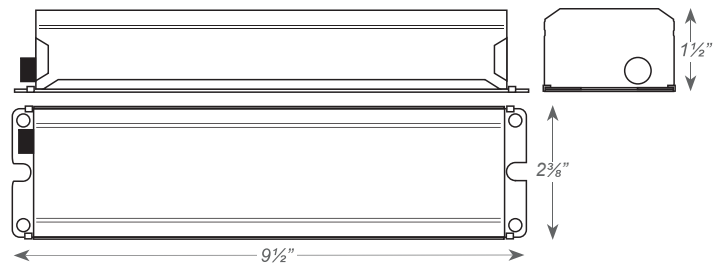

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.



Fluorescent Emergency
Ballast 650 Lumens

Project:	
Catalog#:	
Approved by:	

Electrical Information

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
HL-PAC0006	3.8	3.8	0.270	0.270

Lamp Compatibility Chart

LAMP	INITIAL LUMENS	LAMP	INITIAL LUMENS	LAMP	INITIAL LUMENS
	1-LAMP		1-LAMP		1-LAMP
T8 32W	675	4-Pin PL CF 26W	575	4-Pin Long CF 18W	525
T12 40W	650	4-Pin PL CF 32W	675	4-Pin Long CF 24W	575
4-Pin PL CF 13W	450	4-Pin PL CF 42W	750	4-Pin Long CF 36W	600
4-Pin PL CF 18W	500			4-Pin Long CF 40W	650

