

# Adjustable Output Unit - AOU



### Benefits

- Works with standard 0–10 V dimming drivers, irrespective of the driver manufacturer brand.
- A single unit can control up to 10 drivers.
- Adds flexibility and reduces the need of stocking multiple SKUs by offering an in-field adjustable wattage option. Fixtures can be converted to a lower Lumen/Wattage unit by selecting the appropriate settings.
- Does not require auxiliary power from the LED driver
- Can be utilized to achieve higher efficacies by reducing a fixture’s LED drive current.

### Description

The AOU is an 8-position, constant voltage, dimmer that can be used with 0–10V capable dimming drivers. It can be easily adjusted with a flat-blade screwdriver. The unit comes factory-set at position #8, which is the maximum output level. The unit consumes no standby power and can be removed to convert the luminaire to standard 0–10V dimming.


Works with standard 0–10 V dimming drivers, irrespective of the driver manufacturer brand. A single unit can control up to 10 drivers.

### AOU Position Selector Guide† –

	Position							
	#8	#7	#6	#5	#4	#3	#2	#1
Constant Dimming Voltage (V)	>10	9	8	7	6	5	4	3

†Refer to driver manufacturer’s dimming specification curves for performance detail.

### Dimension (inches):

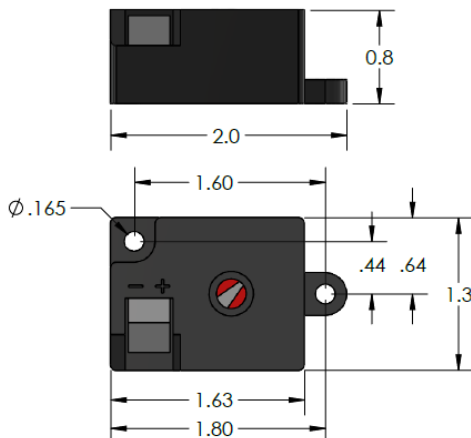

### Product Wiring Schematic:

