

Lose the wires, not the connection.

Powered by IdeaMax, the TRUCAST wireless interactive presentation system connects multiple devices to an interactive display. By eliminating the wires, TRUCAST makes any room a completely unlimited interactive space. With bidirectional touch capabilities, connect any device you need, from a laptop to a smartphone.



Customize how you connect.

TRUCAST works just like a wireless router, but does so much more. Connect to Ethernet, use your own WiFi or use TRUCAST's independent, private WiFi network. Connectivity is easy and secure.

Productivity for the whole company.


Software shouldn't have a limited number of downloads, especially software designed to help make your company more productive. Everyone in your company can download the TRUCAST software to their device, so there's no limit to who can collaborate.

The more the merrier.

TRUCAST lets you project up to four different devices on an interactive display at once. Broadcast your work and see what your colleagues are working on all at once to make your meetings truly collaborative.

Give everyone the power to share ideas.

Once you're connected to TRUCAST, you can share your screen with anyone on the network. See what is on the display of your own device, or pass control to anyone in the room. TRUCAST gives everyone the power to connect and share ideas easily.

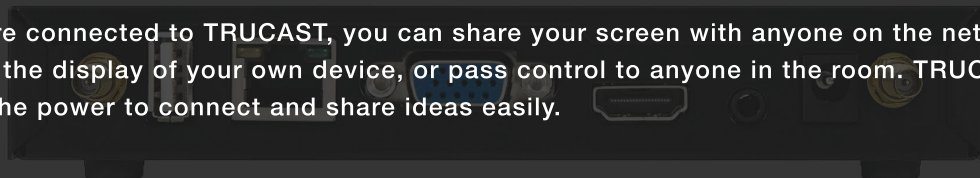

Mac or PC? Your choice.

TRUCAST is platform independent. That means any operating system you use can be part of your company's future. Whether you prefer PC or Mac, it's easy to add TRUCAST to your device, making your work easier and more seamless than ever before.

TRUCAST Wireless Presentation System - Specifications

Parameter	TRUCAST	TRUCAST 2	TRUCAST 3
Standards	IEEE 802.11b/g/n 2.4 GHz IEEE 802.3(10BASE-T) / IEEE 802.3u(100BASE-TX)	IEEE 802.11 b/g/n 2.4 GHz IEEE 802.3(10BASE-T) / IEEE 802.3u(100BASE-TX)	IEEE 802.11a/b/g/n 2.4G/5G Hz (Selective) IEEE 802.3(10BASE-T)/IEEE 802.3u(100BASE-TX)/IEEE 802.3ab(100BASE-T)
Wireless channel	11 (US, Canada); 13 (Europe)	11 (US, Canada); 13 (Europe)	11 (US, Canada); 13 (Europe)
Data Rate	Wireless: Up to 300Mbps / LAN: 10/100Mbps	Wireless: Up to 300Mbps / LAN: 10/100Mbps	Wireless: Up to 300Mbps / LAN: 10/100/1000Mbps
Protocol	TCP/IP	TCP/IP	TCP/IP
IP Configuration	Automatic: DHCP Manual: Static IP address	Automatic: DHCP Manual: Static IP address	Automatic: DHCP Manual: Static IP address
Management	Web-based configuration, SNMP	Web-based configuration, SNMP	Web-based configuration, SNMP
Security	IEEE Standard 64/128 bit WEP/WPA/WPA2-PSK	IEEE Standard 64/128 bit WEP/WPA/WPA2-PSK	IEEE Standard 64/128 bit WEP/WPA/WPA2-Enterprise
Antenna	Dipole 2dBi x 2	Dipole 2dBi x 2	Dipole 2dBi x 2
Video/Audio Systems	11b: -80dBm @ 11Mbps 11g: -70dBm @ 54Mbps 11n: -64dBm @ 802.11n (HT20)	11b: -80dBm @ 11Mbps 11g: -70dBm @ 54Mbps 11n: -64dBm @ 802.11n (HT20)	11b: -80dBm @ 11Mbps 11g: -70dBm @ 54Mbps 11n: -64dBm @ 802.11n (HT20)
Wireless Link Coverage	Up to 300 feet/100 meters, depends on environment	Up to 300 feet/100 meters, depends on environment	Up to 300 feet/100 meters, depends on environment
Supported Output Resolution	VGA: SVGA (800x600) / XGA (1024x768) WXGA (1280x768) / WXGA (1280x800) / WXGA (1360x768) WXGA+ (1220x900) / UXGA (1600x1200) HDMI: 720 (1280x720) / 1080 (1920x1080)	VGA: SVGA (800x600) / XGA (1024x768) WXGA (1280x768) / WXGA (1280x800) / WXGA (1360x768) WXGA+ (1220x900) / UXGA (1600x1200) HDMI: 720 (1280x720) / 1080 (1920x1080)	VGA: SVGA (800x600) / XGA (1024x768) WXGA (1280x768) / WXGA (1280x800) / WXGA (1360x768) WXGA+ (1220x900) / UXGA (1600x1200) HDMI: 720 (1280x720) / 1080 (1920x1080)
Supported Windows Accounts	Administrators, Limited User, Guest	Administrators, Limited User, Guest	Administrators, Limited User, Guest
Supported Operating System	Windows XP / Vista / 7, Mac OS X 10.5 and above SidePad: Android 2.2 and above, iOS 3.2 and above	Windows XP / Vista / 7, Mac OS X 10.5 and above Wifi-Doc, SidePad: Android 2.2 and above, iOS 3.2 and above	Windows XP / Vista / 7 / 8, Mac OS X 10.7-10.9 MirrorOP Sender, MirrorOP Presenter, WebSlides, SidePad
Power	External Power adaptor 5V DC Input 2.6A	External Power adaptor 5V DC Input 2.6A	External Power adaptor 5V DC Input 2.6A
Interface	15Pin VGA, HDMI, RJ-45, USB 2.0 x 3, Power Button, Reset Button, Stereo Phone Jack	15Pin VGA, HDMI, RJ-45, USB 2.0 x 3, Power Button, Reset Button, Stereo Phone Jack	15Pin VGA, HDMI, RJ-45, USB 2.0 x 3, Power Button, Reset Button, Stereo Phone Jack
LED	Power	Power	Power
Mechanical	Dimension: 154mm (L) x 50.66mm (W) x 24mm (H) Weight: 0.52 lbs / 238g	Dimension: 154mm (L) x 50.66mm (W) x 24mm (H) Weight: 0.52 lbs / 238g	Dimension: 159mm (L) x 91mm (W) x 29.9mm (H) Weight: 0.52 lbs / 238g
Environmental Conditions	Operation temperature: 0°C - 40°C Storage temperature: -10°C - 60°C Operating humidity: <90% Storage humidity: <80%	Operation temperature: 0°C - 40°C Storage temperature: -10°C - 60°C Operating humidity: <90% Storage humidity: <80%	Operation temperature: 0°C - 40°C Storage temperature: -10°C - 60°C Operating humidity: <90% Storage humidity: <80%
Certificate	FCC / CE / NCC	FCC / CE / NCC	FCC / CE / NCC
Warranty	1 Year	1 Year	1 Year