




Medix C22

22" Medical Grade Computer
Fanless Design Option

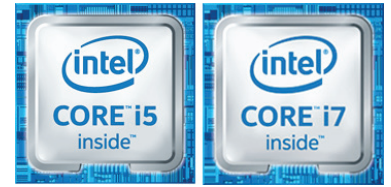

Display	21.5" LCD, 1920 x 1080 (16:9) LED backlit LCD 5-Wire resistive touch Optional: PCAP multi-touch (10 pt)	I/O Ports	4x USB 3.0 1x RS232 Serial port (DB9) 1x RS422/485 Serial port (DB9) 2x RJ45 (LAN) 1x DVI-D (out) 1x DisplayPort (out) Audio ports (line-in/out)
Processor	Intel 6th Gen Core i5/i7 (fanless design option)	Expansion Slots	2x Mini PCIe 1x PCIe x16 or PCI 2.2 (32bit)
Chipset	Intel HM65 (w/ fan model) Intel Broadwell U SOC (fanless model)	Multimedia	Optional: 1.3 Mpixel Camera, Microphone
Operating System	Windows 10, Windows 7	Features	TPM 1.2 and 2.0 Optional: Vpro
Storage	1x 2.5" HDD/SSD Up to 2TB 1x mSATA SSD up to 1TB	Dimensions / Weight	21.26" W x 14.76" H x 3.07" D 14.3 lbs
Video	Intel HD Graphics 530 (w/ fan model) Intel HD Graphics 520 (fanless model)	Enclosure	IP65 Front panel, IPX1 enclosure, antimicrobial
Memory	Up to 132GB DDR4 (2x SO-DIMM)	Mounting	VESA 75/100
Audio	Integrated HD audio (Realtek) Integrated speakers	Accessories	Optional: Stand
Network Interface	1x Gbit Ethernet (Intel i210) 1x Gbit Ethernet (Intel i219-LM)	Vibration/ Shock Resistance	Vibration (operating): 15g/0.53 oz, 11 ms, half sine wave Shock (operating): 5 ~ 17 Hz , Amplitude: 0.117 ~ 500Hz , Acceleration: 1.0G
Wireless	Optional: Intel Wireless AC-7260 & Bluetooth	Environmental	Operating temp: 32° ~ 104°F (0° - 40°C) Storage temp: -4° ~ 140°F (-20° - 60°C) Operating humidity: 10% to 90% @ 40°C, non-condensing Storage humidity: 10% to 90%, non-condensing
Battery	Optional: 1x UPS battery (7.4V, 4800mAh)	Certification	EN60601-1, UL60601-1, FCC Class B, CE, VCCI, UL/cUL
Power	System Input: 9-28V DC AC Adapter: Input: 100 – 240V AC Output: 24V, 7.5A	Limited Warranty	1-Year parts & labor, return to depot

Contact a HOWARDmed Technology Solutions representative
for pricing and ordering information:



Toll Free: 888.912.3151
www.howard-medical.com