

**High performance LCD projector captures attention in classrooms or conference rooms with dynamic images and 2,700 ANSI lumens.**



## Key Features

- XGA 1024 x 768 resolution
- 2,700 ANSI lumens white/color output
- 16 watt audio output
- 5000:1 contrast ratio
- HDMI 2 inputs
- 10,000 hours Hybrid filter\*
- 10,000 hours lamp life (Standard mode)\*\*
- HDCR/Accentualizer/Image Optimizer
- Mobile High-Definition (MHL™)

From the classroom to the conference room, Hitachi's CP-X25LWN LCD projector combines superior image clarity, high quality value, and long-life reliability. Bright, vivid colors with razor-sharp text and bold graphics will truly enhance any lesson or meeting and make it more memorable. For greater installation convenience, the CP-X25LWN has a cloning function which enables you to copy configuration settings from one projector to others of the same model via USB memory. The CP-X25LWN also supports our iOS application Projector Quick Connection App which offers simple control options including sending photo and document files and web site contents to the projector. Plus, Hitachi's ImageCare combines optimal picture performance with maximum energy savings for a lower total cost of ownership. For added peace of mind, Hitachi's CP-X25LWN is also backed by a generous 3 year parts and labor warranty, plus 5 years or 10,000 hours lamp warranty and our world-class service and support programs.

# CP-X25LWN

## UNIQUE FEATURES


### Accentualizer

Hitachi original technology makes pictures look more real by enhancing sharpness, gloss and shade to make pictures as clear as pictures on a flat-panel device. You can also adjust the effects by three levels according to your surroundings so that the colors of projected images are the actual colors of the objects they represent.



### HDCR (High Dynamic Contrast Range)

When average projectors are used in bright rooms, the darker colors of an image deteriorate and images become unclear. Using this function, blurred images caused by room lighting or outside light sources are corrected, and an effect similar to increasing contrast occurs. This results in clear images even in bright rooms.

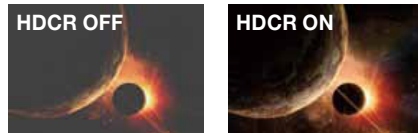

### Cloning Function

Copy configuration settings from one projector to others of the same model via USB memory. Cloning can save almost all PJ settings such as gamma and keystone via USB memory.



### ImageCare Technology

ImageCare is a lamp power control function that combines optimal picture performance with maximum energy savings by decreasing energy usage, improving contrast ratio and lengthening lamp life. The result is a lower total cost of ownership and decreased maintenance cost.



### Image Optimizer

Image Optimizer automatically adjusts HDCR and Accentualizer to improve visibility as lamp brightness dims over time.



### MHL™

MHL (Mobile High-Definition) allows users to mirror their phone/tablet screen with the projector display. It is compatible with any and all apps.



### Perfect Fit 2

Enables the user to adjust individual corners and sides independent of one another. Perfect Fit 2 provides vertical and horizontal digital correction of either barrel or pin cushion distortions. This feature helps correct geometric and complicated distortions. Perfect Fit 2 allows the projected image to fit correctly to the screen quickly and easily.



### Projector Quick Connection App For Mobile Devices


Our iOS application offers full projector control and also provides the capability to display photos, document files and web site contents. Available for iPad®, iPhone® and Android devices. Works over your LAN via your RJ-45 port or via an optional USBWL11N wireless adapter.



## STANDARD FEATURES

### Input Source Naming

Users can rename input sources in more descriptive terms instead of the factory default names.



### Microphone Input

A microphone can be used via the jack located on the input panel. Allows for more dynamic presentations even in standby mode.



### Network Control, Maintenance and Security

Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, image transfer and e-mail alerts for reactive and routine maintenance.



### PC-Less Presentation

By using a USB memory stick or other storage device, you can use the projector without a computer. Menus are easy to see with a thumbnail display. There is also a slideshow function. This feature also supports the following file types: JPG, PNG, BMP, GIF, AVI, and MOV — frame rate is under 12fps 640 x 480.



### PIN Lock / MyScreen / MyText

PIN lock protection can limit projector users. MyScreen PIN lock keeps captured images on the startup screen. Users can set any name logo to MyScreen, clearly identifying ownership. MyText provides the ability to write text on the startup screen such as model name, serial number or location.



### PJMessenger

PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send announcements out to multiple units.



### Present Content via LAN

Hitachi's suite of networking software allows you to easily send content directly from your PC to the projector via your LAN connection.



### Serial Number and Media Access Control Label

A label is affixed in front of the projector to more easily access and read the model name, serial number and MAC address while mounted in ceiling use. This is a convenience for installers, end users and auditors for instant accessibility.



### Wireless Presentation Compatible

Connect the projector to a computer or your network using the optional USB wireless adapter (part number USBWL11N). The adapter supports IEEE802.11n.



HI0469-08/16-Rev.4

All specifications subject to change without notice.

3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.

MHL and the MHL logo are a trademark, registered trademark or service mark of MHL, LLC in the United States and/or other countries.

©2016 Hitachi America, Ltd. All Rights Reserved.

\* Actual filter life will vary by individual filter based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

\*\* Lamp limited warranty period is 5 years or 10,000 hours of use, whichever occurs earlier. See Hitachi CP-X25LWN Limited Warranty for complete details, limitations, exceptions and exclusions.

### Hitachi America, Ltd.

Toll Free: 1.800.HITACHI • Email: dmd.info@hal.hitachi.com

Web: hitachi-america.us/projectors

Blog: dmd.hitachi-america.us/blog



## Long-life reliability with a lower total cost of ownership.

From classrooms to conference rooms, Hitachi's CP-X25LWN can make a big impact on your audience. With 2,700 ANSI lumens brightness and XGA 1024 x 768 resolution, the CP-X25LWN is designed to make any message more memorable with colorful images, crisp text, and powerfully clear audio.



Incorporating Hitachi's leading-edge technology, the CP-X25LWN features high contrast ratio, long lamp life, cloning function enabling you to copy configuration settings from one projector to others of the same model, and is wireless presentation compatible. Plus, embedded networking gives you the ability to manage and control multiple projectors over your LAN (scheduling of events, centralized reporting, image transfer, and e-mail alerts). Even with the array of advanced features, Hitachi's CP-X25LWN is designed for user-friendly operation and installation convenience.



Front View



Top View




Left Profile



Right Profile

## Input/Outputs

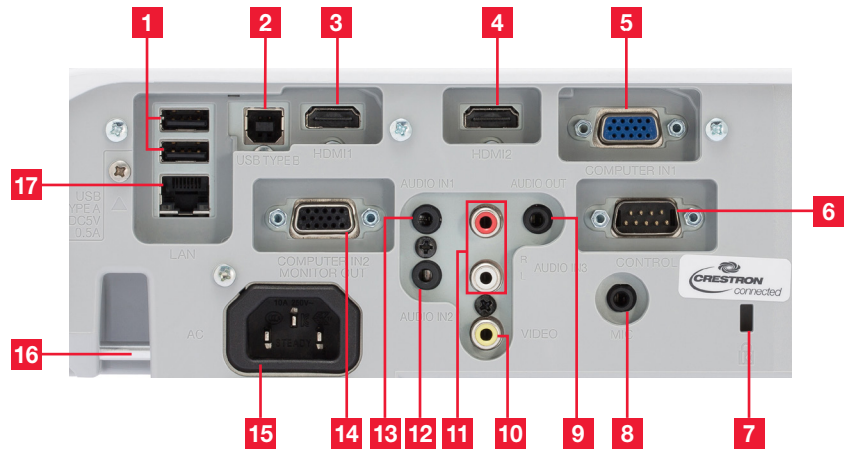

- |                      |                     |                                   |
|----------------------|---------------------|-----------------------------------|
| 1. USB Type A x 2    | 7. Kensington Lock  | 13. Audio in 1                    |
| 2. USB Type B        | 8. Microphone Input | 14. Computer in 2/<br>Monitor Out |
| 3. HDMI1             | 9. Audio Out        | 15. AC                            |
| 4. HDMI2/MHL         | 10. Video           | 16. Security Bar                  |
| 5. Computer in 1     | 11. Audio in 3      | 17. LAN                           |
| 6. Control (RS-232C) | 12. Audio in 2      |                                   |

# CP-X25LWN

HI0469-08/16-Rev.4  
All specifications subject to change without notice.  
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.  
MHL and the MHL logo are a trademark, registered trademark or service mark of MHL, LLC in the United States and/or other countries.  
©2016 Hitachi America, Ltd. All Rights Reserved.

### Hitachi America, Ltd.

Toll Free: 1.800.HITACHI • Email: [dmd.info@hal.hitachi.com](mailto:dmd.info@hal.hitachi.com)  
Web: [hitachi-america.us/projectors](http://hitachi-america.us/projectors)  
Blog: [dmd.hitachi-america.us/blog](http://dmd.hitachi-america.us/blog)



## Accessories and Lenses

<b>Supplied Accessories</b>	Remote control, power cord, computer cable, 2 AA batteries, lens cover, adapter cover, security label, application CD, user's manual CD, user's manual
<b>Optional Accessories</b>	USBWL11N USB wireless adapter, TB-1 wireless pen tablet
<b>Optional Lenses</b>	NA
<b>Replacement Parts</b>	
<b>Lamp</b>	DT01571 with filter
<b>Remote Control</b>	HL03031
<b>Filter</b>	UX38561

## Projection Throw Chart

Screen Size 4:3		Throw Distance	
Diagonal	Width	Min	Max
30	24	34	41
60	48	70	84
80	64	94	113
100	80	118	142
200	160	237	286
300	240	357	429

Throw Ratio: 1.5 - 1.8 : 1 (distance : width)  
Screen size and throw distance are measured in inches.

## Specifications

Display	<b>Projection Technology</b>	3LCD, 3 chip technology
	<b>Resolution</b>	XGA - 1024 x 768
	<b>White Light Output</b>	2,700 ANSI lumens
	<b>Color Light Output</b>	2,700 ANSI lumens
	<b>Colors</b>	16.7 million colors
	<b>Aspect Ratio</b>	Native 4:3/14:9, 16:9, 16:10, zoom compatible
	<b>Contrast Ratio</b>	5,000 : 1 (using active IRIS)
Lens & Operation	<b>Throw Ratio</b> (distance : width)	1.5 - 1.8 : 1
	<b>Focus Distance</b>	35" - 429"
	<b>Display Size</b>	30" - 300"
	<b>Lens</b>	F = 1.9 - 2.3, f = 19 - 23 mm, x 1.2 manual zoom
	<b>Lamp Wattage</b>	150W
	<b>Expected Filter Life*</b>	Approximately 10,000 hours
	<b>Expected Lamp Life**</b>	Approximately 10,000 hours
Compatibility	<b>Speaker Output</b>	16W
	<b>Keystone</b>	H and V: +/- 30°
	<b>Computer</b>	VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed), MAC 16"
	<b>H-Sync</b>	15 kHz - 106 kHz
	<b>V-Sync</b>	50 Hz - 120 Hz
	<b>Composite Video</b>	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
	<b>Component Video</b>	480i, 480p, 576i, 720p, 1080i, 1080p
Connectors	<b>HDMI</b>	480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDS Clock 27 MHz - 150 MHz
	<b>MHL</b>	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, Computer signal TMDS clock 25 MHz - 75 MHz
	<b>Digital Input</b>	HDMI/MHL x 1, HDMI x 1 (supporting HDCP decoding)
	<b>Computer Input 1</b>	15-pin mini D-sub x 1
	<b>Computer Input 2</b>	15-pin mini D-sub x 1 (shared with Monitor out)
	<b>Computer Monitor Output</b>	15-pin mini D-sub x 1 (shared with computer in 2)
	<b>Video Input</b>	
Ratings & Warranty	S-Video	N/A
	Composite Video	RCA jack x 1
	Component Video	15-pin mini D-sub x2 (shared with computer in 1, in 2/Monitor out)
	<b>Audio Input</b>	3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1, MIC-in 3.5 mm mini jack x 1
	<b>Audio Output</b>	3.5 mm stereo mini jack x 1
	<b>Network LAN Wired</b>	RJ-45 port
	<b>Network LAN Wireless</b>	USB-A, IEEE802.11 b/g/n - optional wireless adapter required
<b>USB</b>	Type A x 2 (PC-less presentation, wireless adapter) Type B x 1 (USB display or mouse control)	
<b>Control Terminals</b>	9-pin D-sub x 1 (RS-232 control)	
<b>Power Supply</b>	AC100-120V / AC220-240V, 50/60Hz	
<b>Power Consumption</b>	240W / 220W	
<b>Operating Temperature</b>	41°F - 95°F (5°C - 35°C)	
<b>Dimensions (W x D x H)</b>	12.8" x 9.7" x 3.5" (excluding protruding parts)	
<b>Weight</b>	Approximately 6.8 lbs.	
<b>Approvals</b>	UL 60950-1 / cUL FCC Part 15 subpart B class B	
<b>Warranty</b>	3 year limited parts and labor, plus 5 years or 10,000 hours on the lamp. Extended Service Contract available (additional cost)	

\* Actual filter life will vary by individual filter based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.  
\*\* Lamp limited warranty period is 5 years or 10,000 hours of use, whichever occurs earlier. See Hitachi CP-X25LWN Limited Warranty for complete details, limitations, exceptions and exclusions.



HI0469-08/16-Rev.4

All specifications subject to change without notice.

3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.  
MHL and the MHL logo are a trademark, registered trademark or service mark of MHL, LLC in the United States and/or other countries.

©2016 Hitachi America, Ltd. All Rights Reserved.



## Hitachi America, Ltd.

Toll Free: 1.800.HITACHI • Email: [dmd.info@hal.hitachi.com](mailto:dmd.info@hal.hitachi.com)

Web: [hitachi-america.us/projectors](http://hitachi-america.us/projectors)

Blog: [dmd.hitachi-america.us/blog](http://dmd.hitachi-america.us/blog)

