



\*All images are simulated

## New 75" Ultra HD(4K) Resolution Panel

- All-in-one solution with 75" Ultra HD panel

## Up to 20 touch points (simultaneous)

- Ideal function for classrooms
- You can write from both right and left sides

## Front facing stereo speakers (40W total)

- 40W stereo speakers facilitates delivery of bold sound to your audience

## Both Windows® and Mac OS® compatible

- Greater user versatility

## PC-less writing function

- Once you turn on the power, you can immediately start writing by selecting Easy Pen mode, just one action

## Front HDMI and USB inputs


- Simply plug in your computer with HDMI and USB for touch control and you are ready to go

## Additional convenient features

- LAN port for control, OPS slot, and magnetic stylus pens, four carrying handles on the rear



# HILU75202

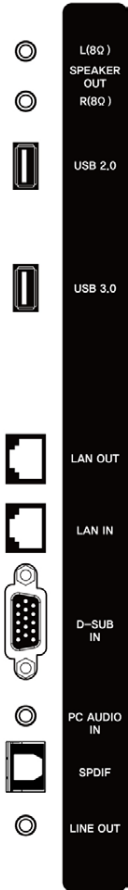

## LED PANEL

<b>Diagonal Size</b>	74.52" (189.3 cm)
<b>Display Resolution (Max.)</b>	3840 x 2160 (UHD)
<b>Brightness (average)</b>	350 cd/m <sup>2</sup>
<b>Viewing Angle</b>	H: 170° / V: 170°
<b>Contrast Ratio</b>	1,000 : 1 (typical)
<b>Supported Colors</b>	1.07B colors (10-bit)
<b>Response Time</b>	6.5ms (gray to gray)
<b>Display Frame Rate</b>	60Hz (actual)
<b>Installation</b>	Landscape orientation

## TOUCH

<b>Detect Area (H x V)</b>	64.95" x 36.53" (1,649.66 mm x 927.94 mm)
<b>Detection Method</b>	Infrared blocking detection method
<b>Touch Tool</b>	Hand or other solid object
<b>Accuracy</b>	±2mm
<b>Response Time</b>	<12ms
<b>Available Touch Point</b>	20 points
<b>Operating Systems</b>	Windows 7, 8, 10/ Mac OS 10.10-10.12
<b>PC Connector</b>	USB

## SIGNAL CONNECTIVITY

<b>Connector</b>	Front: HDMI x 1, USB-B (for touch) x 1, USB-A (for data) x 1 Back: UHD HDMI x 4 (rear x 3, inside OPS x 1), audio mini in, DP, USB-B (for touch) x 1, HDMI out (HDMI pass-through)
<b>Audio Out</b>	Speaker out (R/L), line out
<b>Communication Port</b>	RS-232C (D-sub 9-pin) or LAN (RJ45)
<b>OPS Slot</b>	1

## MECHANICAL

<b>Dimensions Landscape</b>	69.92" x 43.82" x 3.82" (1,776 mm x 1,113 mm x 97 mm)
<b>Weight (Mass)</b>	143 lbs. (65 kg.)
<b>VESA Mount</b>	600 mm x 400 mm, M8 screw
<b>Front Glass</b>	Tempered glass 4.0t (anti-glare type)

## ELECTRICAL

<b>Power Requirement</b>	100 - 240V AC, 50/60 Hz
<b>Power Consumption</b>	Max. 438W
<b>Power Consumption (Standby)</b>	<0.5W
<b>Speaker Output</b>	20W + 20W Stereo (8-ohms)

## ENVIRONMENTAL

<b>Operating Temperature</b>	0 - 40 °C (32 - 104 °F)
<b>Storage Temperature</b>	-20 - 60°C (-4 - 140°F)
<b>Operating Humidity</b>	20% to 80% RH (no condensation)

## OSD FUNCTIONS

<b>OSD Language Function</b>	English / Français / Deutsch / Spanish / Portuguese / Italiano / Danish / Swedish / Norwegian / Suomi / Russian / Polish / Turkish / Hungarian / Chesky / Korean / Japanese / Chinese
<b>OSD Key Lock Function</b>	Support

## ACCESSORIES

<b>Supplied</b>	Touch pen x 2, detachable magnet pen tray, remote control, HDMI Cable, USB cable, power cable, CD (user manual, installation manual, touch driver)
-----------------	--

## CERTIFICATIONS

<b>Standard</b>	QAS, RCM, CB, RoHS, FCC, NRTL
-----------------	-------------------------------



HI0546-06/17

©2017 Hitachi America, Ltd. All Rights Reserved. Design and specifications are subject to change without notice. Microsoft, Encarta, MSN, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Mac OS® is registered trademarks of Apple Inc. HDMI, High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and/or other countries. Crestron® is a registered trademark of Crestron Electronics, Inc. All other trademarks and registered trademarks are the property of their respective owners in the United States and/or other countries.

**Hitachi America, Ltd.**

Toll Free: 1.800.HITACHI • Email: [dmd.info@hal.hitachi.com](mailto:dmd.info@hal.hitachi.com)

Web: [hitachi-america.us/IFPD](http://hitachi-america.us/IFPD)

