

### DISPLAY

#### AVAILABLE COLORS



White



Silver



Black



SHOWN IN BLACK

### KEY FEATURES


- 32" Pro Series True-Outdoor All-Weather Television for permanent outdoor installation
- Landscape Orientation only, use DS-3211P for portrait installation.
- Ultra-Bright (1000 NIT) 32-inch full HD, 1080p LED screen for improved outdoor viewing
- Direct Sunlight-Readable
- Anti-glare protective glass and removable front bezel for easy field servicing
- Massive, side-opening cable/media bay provides easy access (Opening: 7" x 12.5" x 3" deep / Interior: 8" x 14" x 2.5" deep)
- Media bay power port powers media players without the need for external cords (5v@3.5amps / 12v@3amps)
- Side-mounted cable ports for improved access and visibility
- High temperature Enhanced Solar Tolerance (EST) technology prevents isotropic blackout
- Thermal-flow air ventilation system keeps the unit cool & dry in temperatures up to 122 degrees F
- Ability to operate in cold weather (-40 degrees F)
- Exterior designed to protect internal components from rain, snow, dust, insects, humidity, and salt air
- Powder-coated rust-proof aluminum exterior for strength and durability
- RS232 serial control with discrete on, off, and input control (located in the cable-entry compartment)
- Rear IR receiver (located in the cable-entry compartment)
- Innovative water-tight Cable Entry System seals out moisture and allows for easy hook-ups
- Weatherproof detachable 20W speaker bar (Top or bottom mount)
- Quick-change filtration cartridges
- Weatherproof remote control
- Weatherproof control buttons with optional tamper-proof plate
- Remote control Lock-out prevents unauthorized users from changing the programming

<p><b>SCREEN</b></p>	<p>SCREEN 32-inch Diagonal Color Active Matrix TFT LED</p> <p>RESOLUTION 1920 x 1080 Full-HD 1080p</p> <p>ASPECT RATIO 16:9</p> <p>CONTRAST RATIO 1300:1</p>	<p>FRAME RATE 60 Hz</p> <p>VIEWING ANGLE 178° x 178°</p> <p>RESPONSE TIME 8 milliseconds</p> <p>TV FORMATS 1080p, 1080i, 720p, 720i, 480p, 480i</p>
<p><b>CONNECTIONS</b></p>	<p>RF Antenna/CATV (ATSC/QAM/NTSC) x1</p> <p>HDMI HDMI™ Input x2</p> <p>VIDEO COMPOSITE S-Video x1 or Composite Video x1, L/R Audio Inputs x1</p> <p>VIDEO COMPONENT YPbPr plus Stereo Audio x2</p> <p>PC-VGA 15-pin D-sub VGA plus Stereo Audio</p>	<p>CONTROL SET RS232 Serial, Discrete IR Control, Concealed rear IR Window</p> <p>AUDIO OUT Digital SPDIF Audio(Fixed) Analog 1/8" headphone jack (Variable)</p> <p>SPEAKERS 20 WATT detachable speaker bar (top or bottom mount)</p> <p>INPUT POWER 100-240 VAC, 50-60 Hz 2.0 A @ 120v Max (1.25 A @ 120v)</p>
<p><b>TEMPERATURE TOLERANCES</b></p>	<p>OPERATING TEMP -40° to 122° F. (-40° to 50°C.)</p> <p>NON-OP. TEMP -40° to 140° F. (-40° to 60°C.)</p> <p>(OFF MODE WITH POWER APPLIED) The non-operating temperature feature requires power to be applied.</p>	
<p><b>PHYSICAL SPECS</b></p>	<p>ACCESSORIES INCLUDED Weatherproof remote control, top or bottom mount speaker bar</p> <p>EXTERIOR Powder-coated aluminum</p> <p>EXTERIOR COLORS Black, Silver, &amp; White</p> <p>TV DIMENSIONS 31.08in W x 18.87in H (21.87in H with speakers) x 5.42in D</p> <p>789.5mm W x 479.2mm H (555.4mm H with speakers) x 137.7mm D</p> <p>VESA MOUNT PATTERN 100mm x 100mm or 200mm x 100mm</p>	<p>TV WEIGHT 41lbs/18.6kg (45lbs/20.4kg with speaker)</p> <p>SHIPPING DIMENSIONS 37in W x 32in H x 12in D</p> <p>SHIPPING WEIGHT 55 lbs</p> <p>RESIDENTIAL WARRANTY Two-year parts and labor</p> <p>COMMERCIAL WARRANTY Two-year parts and labor</p>

# Specifications

LCD Screen	32-inch diagonal Color Active Matrix TFT LED LCD
Resolution	1920 x 1080 full-HD 1080p
Aspect Ratio	16:9
Backlight Brightness - Surface Luminance, white	1000 nits (cd/m <sup>2</sup> )
Contrast Ratio	1300:1
Viewing Angle	178° x 178°
Response Time	8 milliseconds
TV formats	1080p, 1080i, 720p, 720i, 480p, 480i
Input Connectors:	
Tuner	Antenna/CATV (ATSC/QAM/NTSC) x1
HDMI	HDMI™ Input x 2
Video Composite	S-Video x1 and Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x2
PC	15-pin D-sub VGA plus Stereo Audio
Control Set	RS232 Serial, Discrete IR Control, Concealed rear IR Window
Audio Out	Digital SPDIF x 1 (fixed) Analog 1/8" headphone jack (variable)
Accessory DC Power Out	5vdc @ 3.5amps 1.3mm power jack or usb type A jack 12vdc @ 3amps 2.5mm power jack
Speaker bar	10-watt x 2 channel water-resistant detachable speaker module
Exterior	Powder-coated aluminum
Colors	Black, Silver and White
Input Power	100-240 VAC, 50-60 Hz 2.8 A Max (2.25a @ 120VAC)
Operating Temp.	-40° to 122° F. (-40° to 50° C.) *
Non-op. Temp. (Off-mode with power applied)	-40° to 140° F. (-40° to 60° C.) The non-operating temperature feature requires power to be applied
Accessories Included	Water-resistant remote control, weatherproof sound bar
Dimensions Landscape	31.08in W x 18.87in H (21.87in H with speaker) x 5.42in D 789.5mm W x 479.2mm H(555.4mm H with speaker) x 137.7mm D
Weight	41 lbs; 45 lbs with speakers 18.6kg ; 20.4kg with speakers
Residential Warranty	Two year, in-factory, parts and labor
Commercial Warranty	Two year, in-factory, parts and labor
Mount Pattern	100 mm x 100 mm or 200mm x 100mm

## Dimensions SB-3211

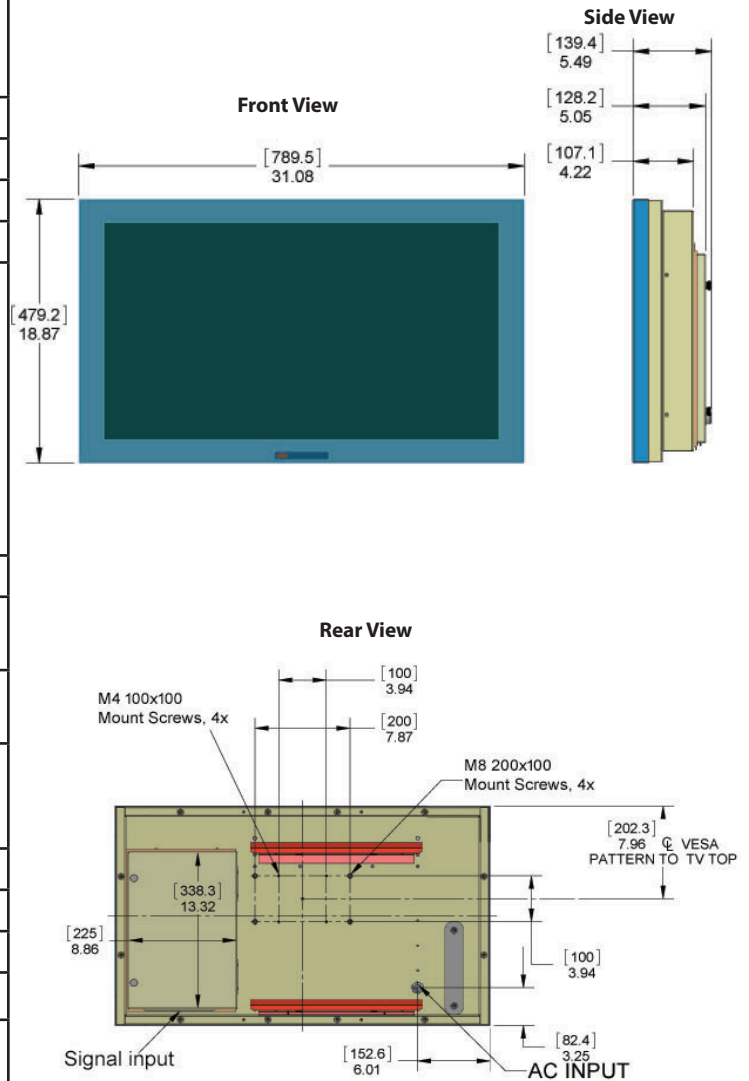

11/04/2016

Specifications are subject to change.