


INSTALLATION INSTRUCTIONS

For models:

NO' III')II ID+II

This model number does not include a mounting arm, photoelectric control, or shorting cap.

**NO3 - NIGHT OWL
LED Dusk-to-Dawn
Utility-Grade**

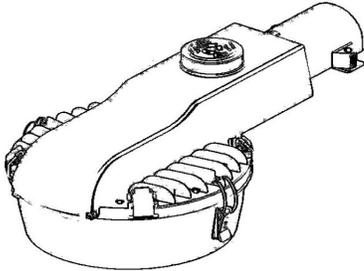

WARNING

Please read instructions carefully before attempting to install fixture, and retain instructions for future reference.

Caution: To avoid electrical shock hazard.

- Turn off the electricity before installing or servicing this fixture.
- Electrical connections need to comply with National Electric Code and local electric code.
- The fixture should be installed by a qualified electrician.

GENERAL SAFETY INFORMATION

1. Disconnect power during installation and before servicing.
2. Risk of fire: Product is for outdoor installation and use only.
3. To avoid the risk of fire or shock, this fixture must be wired in accordance with the National Electric Code and applicable local codes and ordinances.
4. All work should be performed by a qualified electrician.
5. To ensure personal safety, proper grounding is required.
6. Do not touch the yellow portion of the LED when removing the glass lens. Damage may occur.

FIXTURE MOUNTING:

Note: DO NOT use an impact wrench.

Loosen the fitter clamp bolt to accommodate mounting arm. Slide fixture onto the arm. Hand-tighten both bolts at desired luminaire tilt. Finally, torque both bolts equally to tighten (max. 8-10 **ft-lbs**).

FIXTURE WIRING/INSTALLATION

Note: When connecting the fixture to supply wires, make sure the power is off.

1. Push the door latch forward to release door.
2. Feed supply wires through arm and secure the fitter bolts as noted above. DO NOT exceed 10ft-lbs of torque.
3. Make wiring connections to appropriate positions on the terminal block.
3. Confirm terminal block is wired correctly. Line to black, neutral to white, and ground to green. And, form a drip loop in the supply wires.
4. Ensure that the power source voltage and the luminaire voltage ratings match.
5. Ensure the shorting cap (not included) or photoelectric control (not included) is rated for the source voltage.
6. Install shorting cap (not included) or photoelectric control (not included) by inserting plug into receptacle in the proper orientation and twist until in locked position.

2021-12-21

HOWARD[®]
LIGHTING PRODUCTS