

LED UFO High Bay – Gen 2

**Table 1:** Product Specifications

Model	Input Voltage	Input Current (Max.)	Watts	Power Factor	Dimming
LUHB250XMV	100—277VAC 50/60Hz	1.8A	150W	≥0.9	0-10V/PWM/VR


**SAFETY INSTRUCTION**

- Read instructions carefully before attempting to install fixture. Retain instruction for future reference.
- Disconnect power before installing or servicing. This fixture must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
- Never perform maintenance or cleaning while fixture is energized. Disconnect power and allow to cool before servicing.
- All wiring should be performed by a qualified electrician.
- Protect all wiring connections with approved insulators rated 600V/150°C.
- Please consult product specifications (Table 1) before wiring to estimate total load.
- Upon receipt of this fixture, thoroughly inspect it for any damage.




**INSTALLATION**

1. Install the hook on fixture as shown in Fig. 1
2. Hang the fixture using suitable mounting chain (sold by others). Fig. 2.
3. Connect wires using wire-nuts (provided by others); connect white to “Neutral”, black to “Line”, and green to “Ground” as shown in Fig. 3.

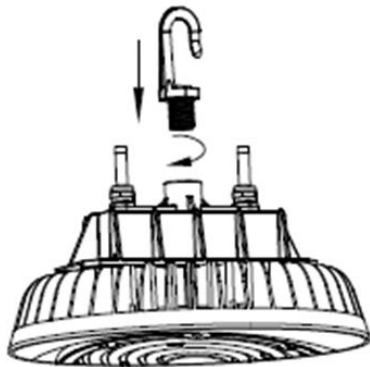


**Fig. 1**

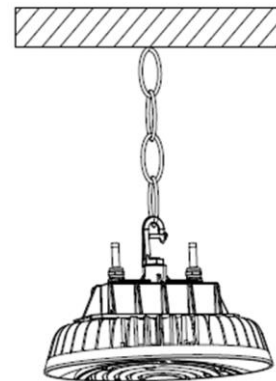

**Fig. 2**

**Wiring Diagram:**

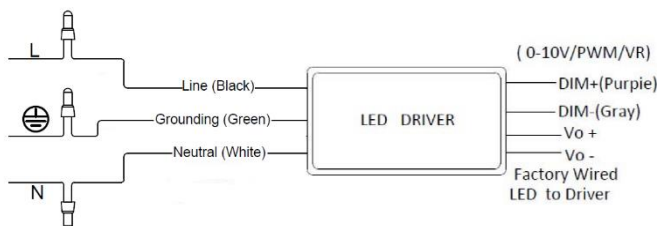

**Fig. 3**

**TROUBLESHOOTING TIPS:** If the fixture fails to operate properly, check the following:

- Verify dimming leads, purple/gray are isolated (not shorted).
- Verify proper line voltage is present.
- Verify input wiring connections to power source.
- Verify that the fixture is grounded.