




12/14/2011

**Compact Fluorescent Lamp - Plug-in
18 Watt Double Tube (2-Pin)**


Compact Fluorescent Lamps

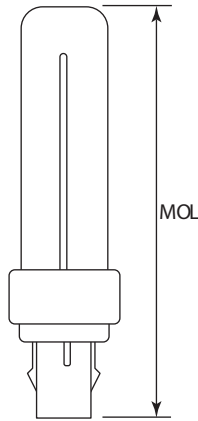


G23-2







GX23-2



G24d-2



G24d-3



Project:	
Catalog#:	
Approved by:	

Ordering Information





Howard Catalog Number (Ordering Code)	CF18D/835
UPC Code	01388
Description	Compact Fluorescent
Package Quantity	50

Physical Characteristics

Bulb	Double Tube
Base	G24d-2
MOL (Maximum Overall Length)	154

Operating Characteristics

Lamp Watts (Nominal)	18
Approx. Initial Lumens	1200
Approx. Mean Lumens	1080
Average Rated Life (Hours)	10000
Color Temperature (K)	3500
CRI (Color Rendering Index)	82



Note:

1. If the outer glass is broken, shut off the power immediately and remove the lamp after it has cooled.
2. Use within voltage limits recommended by ballast manufacturer.
3. Protect lamp base, socket and wiring against moisture, corrosive atmospheres and excessive heat.
4. Replace the lamp if the outer glass bulb has been scratched, cracked or damaged in any way.
6. Take care in handling and disposing of lamps.
7. Although this product meets TCLP, please dispose in accordance with federal, state and local requirements.

8. WARNINGS, CAUTIONS and OPERATING INSTRUCTIONS for

Compact Fluorescent Lamps: These lamps must be operated in fixtures designed for use with Compact Fluorescent Plug-in. The fixture wattage (rating) must match the wattage indicated on the outer glass bulb. Do not scratch the outer bulb or subject it to pressure as this could cause the outer bulb to crack or shatter. Operating the lamp improperly may result in **PERSONAL INJURY, PROPERTY DAMAGE, BURNS and FIRE.**

9. Specifications subject to change. Actual results may vary.