

Vaportight LED Strip

EVSL Series, 4-Foot Strip

Project:	
Catalog#:	
Approved by:	

Features

- Polycarbonate lens and housing provide durability under demanding environments
 - Color Rendering Index (CRI): > 80
 - Color Options: 4000K, 5000K CCT
 - High efficacy >130 LPW
 - Long LED life; L70 > 120,000 hours*
 - Rated for ambient temperatures between -30°C (-22°F) to 50°C (122°F)
 - Input Voltage: 120 – 277V; 50/60 Hz
 - Power Factor (PF) > 0.9, THD < 20%
 - Dimmable: 0-10VDC
 - UL/cUL Listed – suitable for wet locations
 - IP65
 - Warranty: 5 years
- *L70 hours are IES TM-21-11 calculated hours.

Applications

- Parking Garage
- Eaves
- Warehouses
- Canopies
- Walkways
- Stairwells
- Utility Lighting
- Low Bay
- Industrial/commercial



Visit www.designlights.org for the Qualified Product




Mounting Options

- V-Hooks included
- Surface Mounting hardware included
- Multiple drill locations allow for other mounting options. Requires 7/8" step drill.

Ordering Information

Ordering Information						Remarks	
Model Name	Color Temp - CCT	Input Power (W)	Delivered Lumens	Input Voltage	Latch Type	DLC Product ID	Be careful with Chemical exposure. Please consider our VSL4 series, for swimming pool, car wash, or other outdoor applications with prolonged moisture/UV exposure.
EVSL4A40MVS	4000K	38	5,100	120– 277VAC 50/60Hz	Stainless Steel	S-FCM50U	
EVSL46540MV	4000K	65	8,450		Plastic	Not Listed	
EVSL46550MVS	5000K	65	8,500		Stainless Steel		

Dimensions

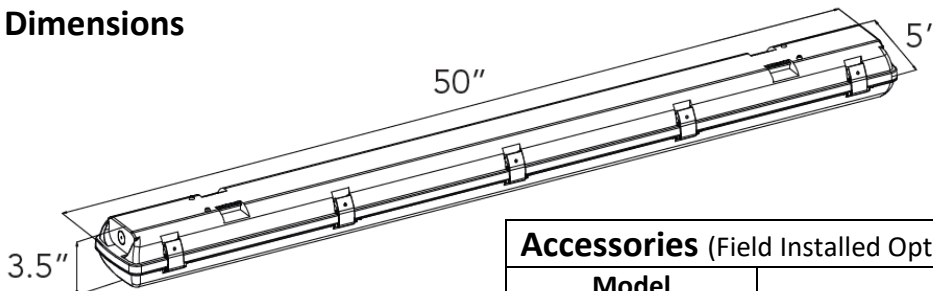

Accessories (Field Installed Options)

Model	Description
EVSL4-FR-LENS	Replacement frosted polycarbonate lens for EVSL fixtures
EVSL4/PC-LATCH	Replacement Polycarbonate Latches (10 latches per bag)
EVSL4/MT-LATCH	Replacement Stainless Steel Latches (10 latches per bag)