


9/5/2013

**T5 Linear Fluorescent Lamp**  
**54 Watt / 85 CRI / 5000K**  
**HIGH OUTPUT**

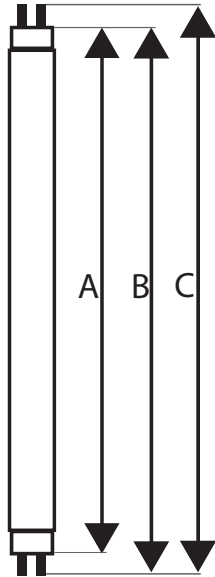

|              |  |
|--------------|--|
| Project:     |  |
| Catalog#:    |  |
| Approved by: |  |

**Ordering Information**


|                                       |                                   |
|---------------------------------------|-----------------------------------|
| Howard Catalog Number (Ordering Code) | F54T5/850/HO/40P                  |
| UPC Code                              | 02784                             |
| Description                           | T5 High Output Linear Fluorescent |
| Package Quantity                      | 40                                |

**Physical Characteristics**

|   |                          |
|---|--------------------------|
| Base  | Mini Bipin (G5)          |
| Bulb Type   | T5 (5/8 inch)            |
| Bulb Description  | Tubular Fluorescent Lamp |
| Nominal Length  | 46                       |
| Base face to base face (Amax) (in)                      | 45.24                    |
| Base face to end of opposite base pin (Bmin/Bmax) (in)  | 45.42/45.52              |
| End of base pin to end of the opposite pin end (C) (in) | 45.79                    |

**Operating Characteristics**

|                                |       |
|--------------------------------|-------|
| Nominal Wattage                | 54    |
| Approximate Initial Lumen (lm) | 5000  |
| Approximate Mean Lumen (lm)    | 4950  |
| Average Rated Life (hours)     | 30000 |
| Color Temperature (K)          | 5000  |
| Color Rendering Index (CRI)    | 85    |

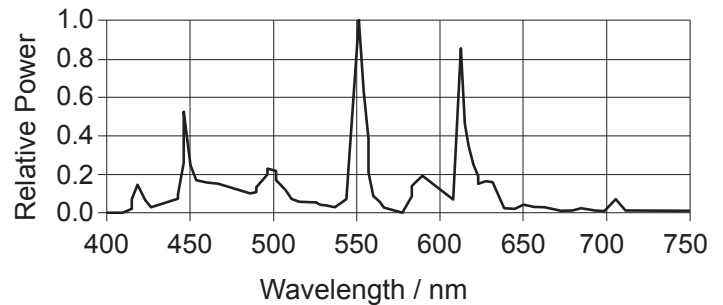

Note: Rated lamp life is 30,000 hours based on 3 hours per start. Lamp life will be affected when using occupancy sensors, dimmers, or dimming systems. These products are low-mercury fluorescent lamps and pass the Federal TCLP for hazardous waste. Disposal regulations may vary; check local and state regulations.

Specifications subject to change without notice.

Linear Fluorescent Lamps