

LED Flood Light

FLL38-120 and FLL38W-120
120VAC, 50/60Hz operation

Project:	
Catalog#:	
Approved by:	
Date:	

Features

- Energy Saving
- Comparable to 300W halogen while using less energy
- 50,000 hour LED lifespan for maintenance-free operation
- Heat dissipating fins optimizes thermal management

Housing

- Low-copper, aluminum die-cast housing and lens frame
- Heat dissipating fins for optimized thermal management.
- Durable polyester powder coat finish
- Bronze or white housing

Lens/Refractor

- Tempered glass lens, thermal shock and impact resistant.

LEDs/LED Driver

- 38W
- Color temp: Neutral White (4100K)
- CRI: 80
- 3,950 Lumen Output
- 50,000 Hour Life
- Input voltage: 120VAC 50/60 Hz
- Knurled notches securely retain rotated position even in demanding environments.

Mounting

- 1/2" NPS aluminum die-cast swivel arm fits to standard junction box (not included).
- Side screw on arm knuckles allows for optics aiming.

Certifications

- UL/CUL Listed, suitable for Wet Locations

Warranty


- 2-Year Warranty

Applications


Ideal for building facades, security, accenting architecture, signs and displays.



Photometrics

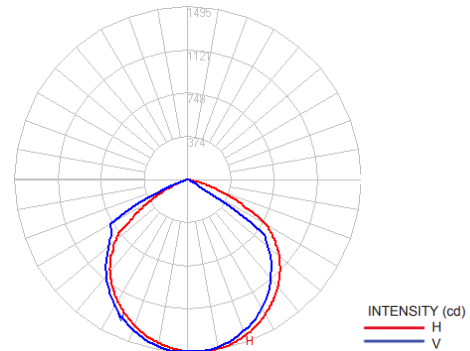

Dimensions

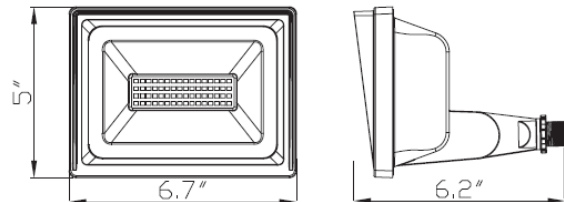

Ordering Information						
UPC Code	Model #	Input Wattage	Lumens	Driver	Voltage	Housing Color
09504	FLL38-120	38 Watt	3,950 lm	LED	120VAC 50/60 Hz	Bronze
09505	FLL38W-120					White

Sample Ordering Information

FLL38-120
38W, 3,950 Lumens
4100K
120VAC
Bronze Housing

