


12/13/2011


**High Pressure Sodium  
100 Watt ED17 (Clear) Lamp**

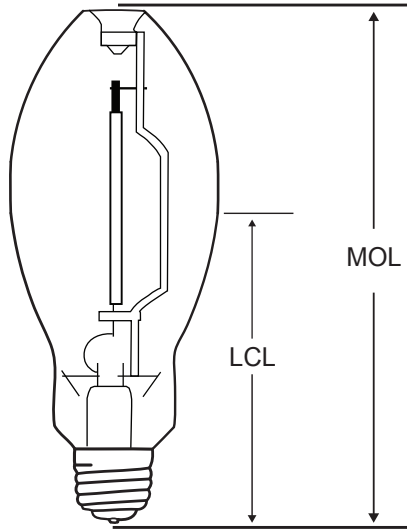


|              |  |
|--------------|--|
| Project:     |  |
| Catalog#:    |  |
| Approved by: |  |

| Ordering Information                  |                      |
|---------------------------------------|----------------------|
| Howard Catalog Number (Ordering Code) | LU100/MED            |
| UPC Code                              | 01186                |
| ANSI Designation                      | S54                  |
| Description                           | High Pressure Sodium |
| Package Quantity                      | 12                   |
| Physical Characteristics              |                      |
| Bulb Size                             | ED17                 |
| Bulb Finish                           | Clear                |
| Base                                  | Medium               |
| MOL (Maximum Overall Length)          | 5.43                 |
| LCL (Light Center Length)             | 3.43                 |
| Operating Characteristics             |                      |
| Lamp Watts (Nominal)                  | 100                  |
| Approx. Initial Lumens                | 9,500                |
| Approx. Mean Lumens                   | 8,550                |
| Average Rated Life (Hours)            | 24,000               |
| Color Temperature (K)                 | 2,100                |
| CRI (Color Rendering Index)           | 22                   |
| Operating Position                    |                      |
| Universal                             |                      |

**HOWARD INDUSTRIES HPS LAMPS**  
Typical Lumen Maintenance Curve

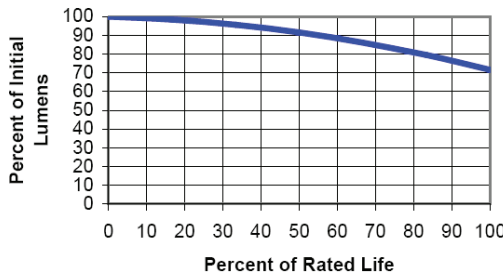

**HOWARD INDUSTRIES HPS LAMPS**  
Typical Survival Curve

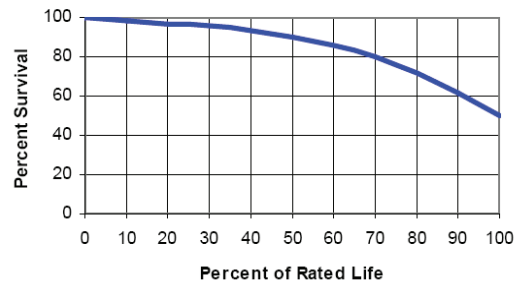

**Note:**

1. If the outer glass is broken, shut off the power immediately and remove the lamp after it has cooled.
2. Use only auxiliary equipment meeting ANSI standards. Use within voltage limits recommended by ballast manufacturer.
3. Protect lamp base, socket and wiring against moisture, corrosive atmospheres and excessive heat.
4. Replace the lamp if the outer glass bulb has been scratched, cracked or damaged in any way.
5. Do not use this lamp in a fixture, which redirects a substantial portion of the energy toward the arc tube and its immediate vicinity, as this may lead to early lamp failure.
6. Take care in handling and disposing of lamps. If arc tube is broken, avoid skin contact with any of the contents or fragments.
7. The arc tube of this lamp contains sodium and mercury. Although this product meets TCLP, please dispose in accordance with federal, state and local requirements.

8. **WARNINGS, CAUTIONS and OPERATING INSTRUCTIONS for High Pressure Sodium Lamps:** These lamps must be operated in fixtures designed for use with High Pressure Sodium Lamps. The fixture wattage (rating) must match the wattage indicated on the outer glass bulb. Do not scratch the outer bulb or subject it to pressure as this could cause the outer bulb to crack or shatter. Operating the lamp improperly may result in **PERSONAL INJURY, PROPERTY DAMAGE, BURNS and FIRE.**
9. Specifications subject to change. Actual results may vary.

**Important:** Mercury-containing lamps must be recycled. Improper disposal can release mercury, which poses risks to both health and the environment. Please dispose in accordance with federal, state and local requirements.



To locate a collection site near you, enter your zip code at [lamprecycle.org](http://lamprecycle.org).

09/18/24