


12/13/2011


**High Pressure Sodium-Standby  
100 Watt ED23.5 (Clear) Lamp**

Project:	
Catalog#:	
Approved by:	

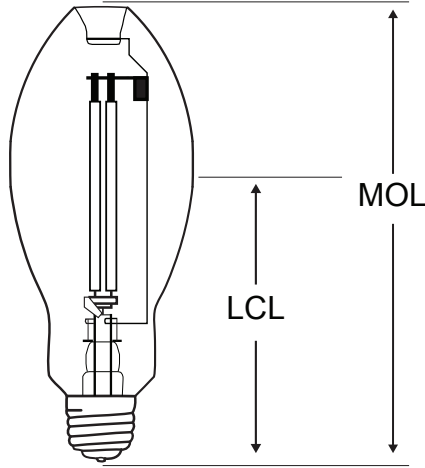


Ordering Information	
Howard Catalog Number (Ordering Code)	LU100/SBY
UPC Code	02189
ANSI Designation	S54
Description	High Pressure Sodium
Package Quantity	12
Physical Characteristics	
Bulb Size	ED23.5
Bulb Finish	Clear
Base	Mogul
MOL (Maximum Overall Length)	7.75
LCL (Light Center Length)	5
Operating Characteristics	
Lamp Watts (Nominal)	100
Approx. Initial Lumens	9,500
Approx. Mean Lumens	7,600
Average Rated Life (Hours)	40,000 <sup>9</sup>
Color Temperature (K)	2,100
CRI (Color Rendering Index)	22
Operating Position	
Universal	

**HOWARD INDUSTRIES HPS LAMPS**  
Typical Lumen Maintenance Curve

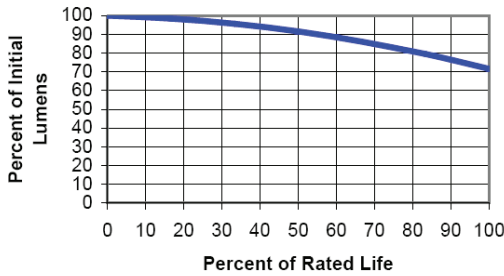

**HOWARD INDUSTRIES HPS LAMPS**  
Typical Survival Curve

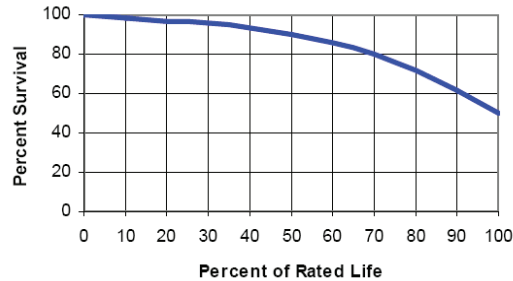

**Important:** Mercury-containing lamps must be recycled. Improper disposal can release mercury, which poses risks to both health and the environment. Please dispose in accordance with federal, state and local requirements.



To locate a collection site near you, enter your zip code at [lamprecycle.org](http://lamprecycle.org).

09/18/24

**Note:**

1. If the outer glass is broken, shut off the power immediately and remove the lamp after it has cooled.
2. Use only auxiliary equipment meeting ANSI standards. Use within voltage limits recommended by ballast manufacturer.
3. Protect lamp base, socket and wiring against moisture, corrosive atmospheres and excessive heat.
4. Replace the lamp if the outer glass bulb has been scratched, cracked or damaged in any way.
5. Do not use this lamp in a fixture, which redirects a substantial portion of the energy toward the arc tube and its immediate vicinity, as this may lead to early lamp failure.
6. Take care in handling and disposing of lamps. If arc tube is broken, avoid skin contact with any of the contents or fragments.
7. The arc tube of this lamp contains sodium and mercury. Although this product meets TCLP, please dispose in accordance with federal, state and local requirements.

8. **WARNINGS, CAUTIONS and OPERATING INSTRUCTIONS for High Pressure Sodium Lamps:** These lamps must be operated in fixtures designed for use with High Pressure Sodium Lamps. The fixture wattage (rating) must match the wattage indicated on the outer glass bulb. Do not scratch the outer bulb or subject it to pressure as this could cause the outer bulb to crack or shatter. OPERATING the lamp improperly may result in **PERSONAL INJURY, PROPERTY DAMAGE, BURNS and FIRE.**
9. Standby feature is not guaranteed beyond 24,000 operating hours.
10. When power is restored after a momentary power interruption, the second arc tube will instantly light and provide 5% to 10% of the total light output, then increase to 80% within 1 to 2 minutes. Standby operation is only applicable to the first 24,000 hours of life.
11. Specifications subject to change. Actual results may vary.