

Large Wall Pack - LED

Assembled in the USA using domestic & foreign components.

Features

- Construction
 - One-piece die-cast aluminum housing and hinged, removable die-cast aluminum door
 - One-piece silicone gasket seals the optical chamber
 - Housing has a textured bronze finish
 - Borosilicate molded glass lens
 - 1/2" conduit access, sides, top, or rear knockouts
- Photocell adaptable and UL listed for wet locations
- LED driver and electrical components are mounted to the die-cast housing for optimal heat sinking and operating efficiency
- UL recognized integral LED electronic driver is Class 2 rated for 120-277V, 50/60Hz
- LEDs provide 80+ CRI in warm, neutral, and cool white colors
- 0-10V standard dimming capability
- The LED system delivers, on average, 70% of lumen maintenance (L70) at 100,000 hours
- Suitable for ambient temperature up to 55°C (131°F) for LWP-XX-55, LWP-XX-75 configurations and up to 45°C (113°F) for LWP-XX-90 configuration
- 5 Year warranty

Project:	
Catalog#:	
Approved by:	
Date:	



Classic look - modern performance



Ordering Information <small>Sample Model: LWP-5075-LED-MV</small>			
Series	Color	Configuration	Factory Installed Options (y)
LWP-	50	75-LED-MV	
LWP-	30: 3000K	55-LED-MV¹ 6,600 Lumens, 53W	(blank): No FIO -M: Microwave Motion Sensor
	40: 4000K	75-LED-MV 9,400 Lumens, 80W	
	50: 5000K	90-LED-MV 12,000 Lumens, 95W	

¹Not available in 5000K

Note: Order with (-M) for title 24 compliance in CA

Cross Reference Chart				
Comparable to HID		LED Replacement		Energy Savings
Source	Input Watts ²	Model #	Input Watts	Percentage
400W	464	LWP-5090-LED-MV	95	80%
250W	295	LWP-5075-LED-MV	80	73%
150W	185	LWP-5055-LED-MV	53	71%

²120V on Quad Tap Ballast



Accessories (sold separately)	
Catalog #	Description
LCPCMV	LED compatible external stem & swivel mount electronic photocontrol ³

³Please use LED compatible electronic components to maintain warranty.

Applications

Ideal for parking facilities, entry ways, perimeter/pathway lighting for underpasses.




Dimensions

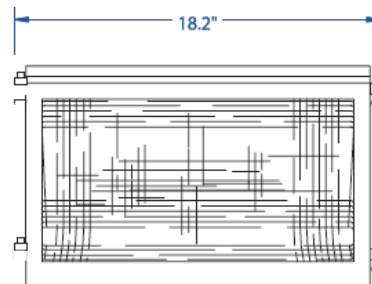

Proudly Assembled IN THE USA*

*Foreign and domestic components.

Photometric Details (Data shown for LWP-3075 model at a 12ft. mounting height)

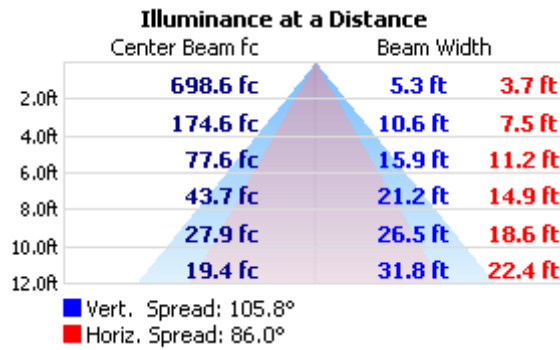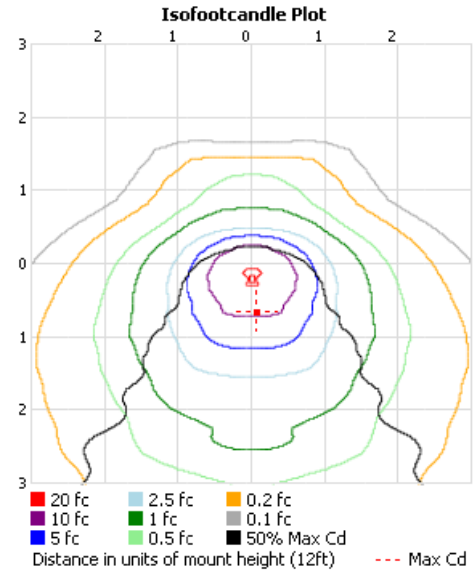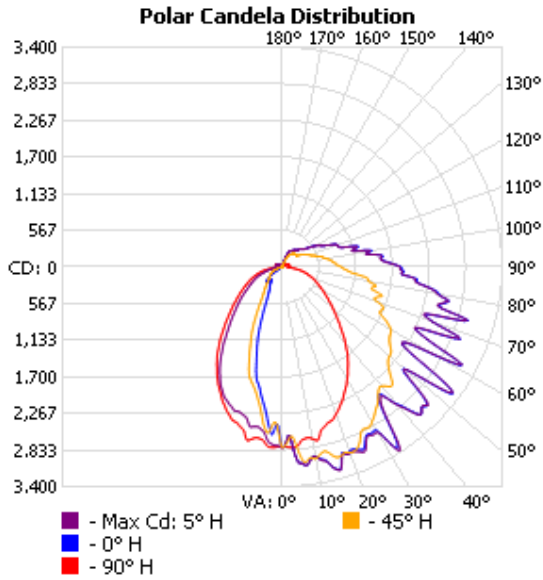

Product Performance

Model #	Lumen Output (Lm)	Efficacy (lm/w)	Nominal Input Power (W)
LWP-3055-LED-MV	6279	119	53
LWP-4055-LED-MV	6777	128	53
LWP-5055-LED-MV	6622	125	53
LWP-3075-LED-MV	8966	113	79
LWP-4075-LED-MV	9677	122	79
LWP-5075-LED-MV	9456	119	79
LWP-3090-LED-MV	11369	120	95
LWP-4090-LED-MV	12253	129	95
LWP-5090-LED-MV	12009	126	95