

Mini LED Wall Pack

MINILWPP25-MV

25 Watts: 3000 Lumens

Project:	
Catalog#:	
Approved by:	

Features

- Energy efficient LED luminaire
- Replaces 50 – 70W HID fixture
- Standard housing color: Bronze
- Color Temperature: 5000K standard
- Lens: Polycarbonate prismatic refractor
- Photocell: Standard
- Input Voltage: 120 – 277V; 50/60 Hz
- LED Life Span: 50,000 hours
- Suitable for wet locations
- UL Listed

Mounting

- Mounts to a standard 4" electrical box

Warranty

- 5-Year Warranty



Applications


Ideal for commercial and residential outdoor applications – warehouses, entryways, perimeter, security, shopping centers, schools, and apartments.



Ordering Information

Model Number	Input Power (W)	Delivered Lumens	Input Voltage	Surge Protection	Dimensions (inches)	UPC Code
MINILWPP25-MV	25W	3000 Lm	120-277V 50/60Hz	4kV	8.9" tall x 5.7" wide x 3" deep	09516

Dimensions

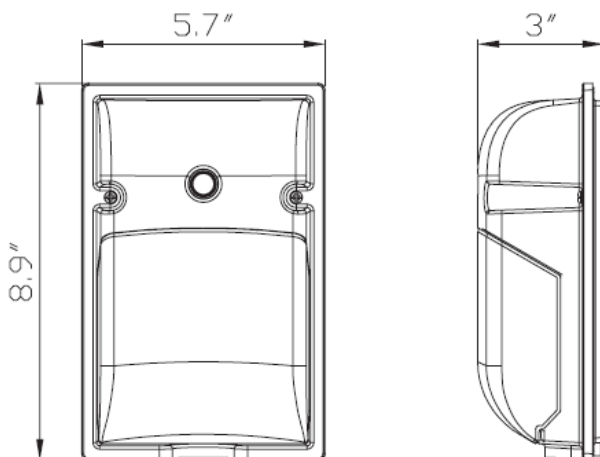

Application Photo

