

Medium Wall Pack - LED

Assembled in the USA using domestic & foreign components.

Features

- Construction
 - One-piece die-cast aluminum housing and hinged, removable die-cast aluminum door
 - One-piece silicone gasket seals the optical chamber
 - Housing has a textured bronze finish
 - Borosilicate molded glass lens
 - 1/2" conduit access, sides, top, or rear knockouts
- Photocell adaptable and UL listed for wet locations
- LED driver and electrical components are mounted to the die-cast housing for optimal heat sinking and operating efficiency
- UL recognized integral LED electronic driver is Class 2 rated for 120-277V, 50/60Hz
- High output LEDs provide 80+ CRI in 5000 K CCT
- The LED system delivers, on average, 70% of lumen maintenance (L70) at 60,000 hours
- Suitable for ambient temperature up to 55°C (131°F)
- 5 Year warranty

Project:	
Catalog#:	
Approved by:	
Date:	



Classic look - modern performance




Ordering Information			
Sample Model: MWP-5040R-LED-MV			
Series	Color	Configuration	Factory Installed Options (y)
MWP	50	40R-LED-MV	
MWP-	50: 5000K	40R-LED-MV 4,660 Lumens, 41W	(blank): No FIO
		55R-LED-MV 5,490 Lumens, 51W	M: Microwave Motion Sensor

Note: Order with (-M) for title 24 compliance in CA


Applications

Ideal for parking facilities, entry ways, perimeter/pathway lighting for underpasses.

Dimensions

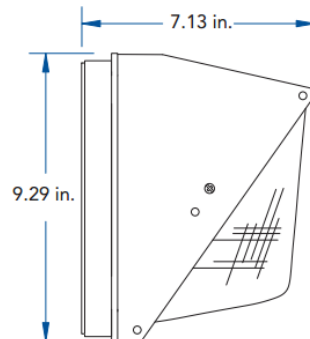

Proudly Assembled IN THE USA*

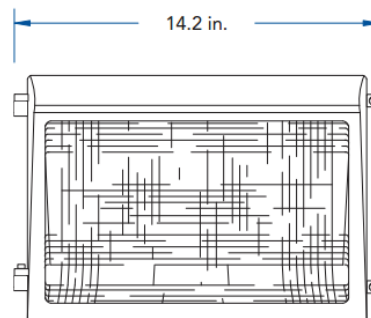

Cross Reference Chart				
Comparable to HID		LED Replacement		Energy Savings
Source	Input Watts ¹	Model #	Input Watts	Percentage
150W	185	MWP-5055R-LED-MV	51	72%
100W	129	MWP-5040R-LED-MV	41	68%



¹120V on Quad Tap Ballast

Accessories (sold separately)	
Catalog #	Description
LCPCMV	LED compatible external stem & swivel mount electronic photocontrol ²

²Please use LED compatible electronic components to maintain warranty.

*Foreign and domestic components.

Photometric Details (Data shown for MWP-5055R model at 12ft. mounting height)

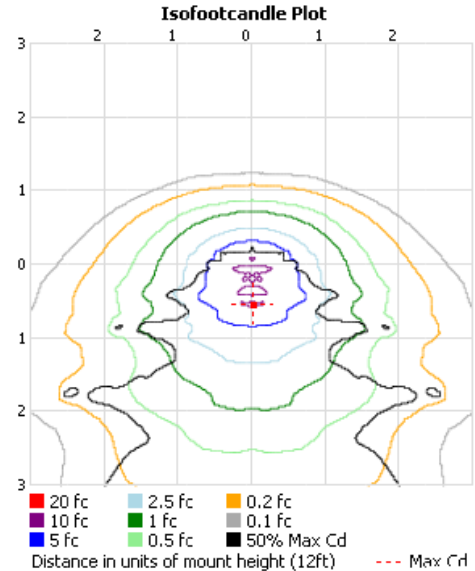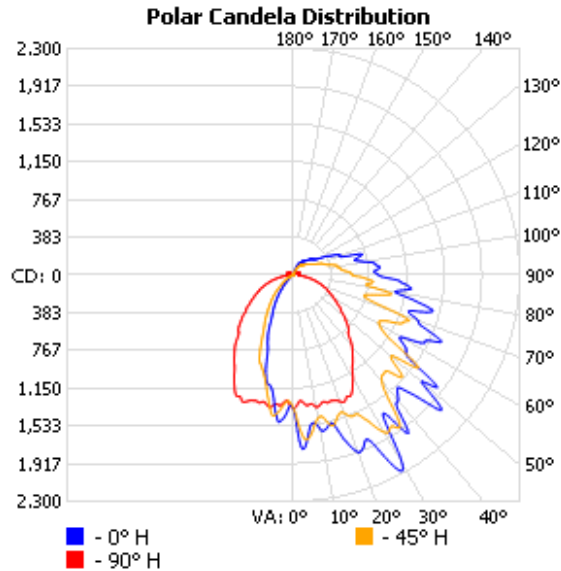

Illuminance at a Distance

	Center Beam fc	Beam Width	
2.0ft	338.9 fc	4.2 ft	3.3 ft
4.0ft	84.7 fc	8.5 ft	6.5 ft
6.0ft	37.7 fc	12.7 ft	9.8 ft
8.0ft	21.2 fc	17.0 ft	13.0 ft
10.0ft	13.6 fc	21.2 ft	16.3 ft
12.0ft	9.4 fc	25.5 ft	19.5 ft

■ Vert. Spread: 93.5°
■ Horiz. Spread: 78.3°