

Versalite LED Wallpack

VL Series – Wattage Selectable

Gen-2 Premium Series

Project:	
Catalog#:	
Approved by:	



Description

Versalite VL Series Wall pack offers great energy savings compared to HID systems. It features a heavy-duty, spring-loaded hinge, which provides the flexibility of focusing light near the mounting surface (wall pack) or projecting light forward (flood).

Features

- ADC12 Aluminum heat sink, outdoor powder coating
- Bronze polyester powder coat finish
- 100,000 hours maintenance-free operation to L70*
- Wall mount for wall packs
- Heavy-duty, spring-loaded hinge provides vertical adjustability of the luminaire housing up to 95°.
- Adjustability provides for a range of lighting effects from full-cutoff downlight to forward throw.
- Knurled notches securely retain rotated position even in demanding environments.
- Color Temperature: 5000K standard
- Color Rendering Index (CRI): > 70
- Input Voltage: 120 – 277V; 50/60 Hz
- Power Factor (PF) > 0.9, THD < 20%
- Dimmable: 0-10V, PWM, VR

*L70 hours are IES TM-21-11 calculated hours.

Applications

Wall Mount

- Loading Docks
- Entrances
- Parking Areas
- Perimeter
- Underpasses


Flood Applications

- Signage
- Building Façade
- Displays
- Security Lighting

Warranty and Listings

- UL/cUL Listed for wet locations (-40°C to 40°C / -40°F to 104°F)
- IP65 rated
- Complies with FCC Part 15, class B
- 5-year warranty on all electronics and housing.

Dimensions

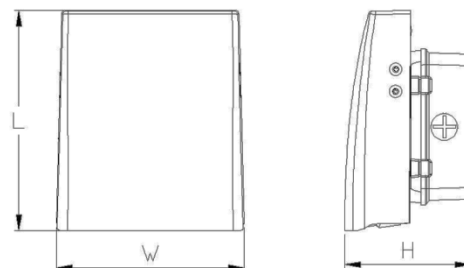

Models	L (in.)	W (in.)	H (in.)
VL505P	9	7.6	4.5
VL1205P	13	11	5.5

Ordering Information

Model Name	Input Power (W)	Delivered Lumens (Lm)	Input Voltage	CCT/CRI	DLC ID	Beam Angle	BUG	Max. Current @120V
VL505P	50W, 6,100 Lumens 40W, 4,880 Lumens 30W, 3,660 Lumens 20W, 2,440 Lumens		120–277VAC 50/60Hz	5000K; CRI 70+	POK3L3VK	90 ° x 120°	B2-U2-G1 50W rating	0.65 A
VL1205P	120W, 15,800 Lumens 100W, 13,170 Lumens 80W, 10,530 Lumens 50W, 6,590 Lumens				PG7WD70H	90 ° x 110°	B3-U3-G1 120W rating	1.4 A




Versalite LED Wallpack

VL Series – Wattage Selectable

Gen-2 Premium Series

Project:	
Catalog#:	
Approved by:	

Wattage Selection

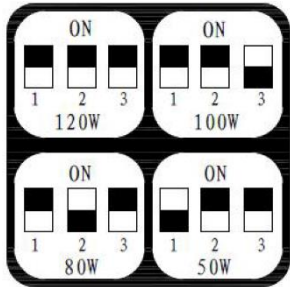

50W: 20/30/40/50W
120W: 50/80/100/120W

Mounting Options

